

Elegance



Elegance

Emergency Luminaires & Exit Signs
Surface Mounted, Single Sided

Specifications


Application	Escape Sign, Anti-Panic Lighting, Escape Route lighting, Hazardous Area Lighting
Mounting	Direct mounting to wall & ceiling. Recessed mounting is available by accessory
Type	Manual Test, Self Test, DALI, Central
Mode	Selectable maintained/non-maintained
Emergency Duration	Selectable 1/3 hours
Viewing Distance	26m. Single sided
Light Source	LED module, 8 mid power leds, 6500K, CRI>80
Battery	Ni-Cd, Ni-MH, Li-FePO4
Wiring	Up to 2x2,5 mm ² quick fit terminal block
Cable Entry	Four easy breakable entry holes back, rear & top parts
Power Supply	230 Volt, 50/60Hz, min 1.6W, max 5W
Protection	IP65
Temperature Range	5-40°C
Electrical Class	Class II (no earth wiring required)
Material	White polycarbonate housing



Ordering Details

Code	Type	Battery	Led Module	Duration & Light Output	
ELG-SM116E-LF	ECO	Li-FePO4	3.2V-1.6Ah	8 Led	1h: 290 Lm, 3h:145 Lm
ELG-SM138E-LF			3.2V-3.8Ah	3h: 290 Lm, 8h:110 Lm	
ELG-HP216E-LF		30 Led	6.4V-1.6Ah	1h: 500 Lm, 3h:250 Lm	
ELG-HP238E-LF			6.4V-3.8Ah	3h: 500 Lm, 8h:180 Lm	
ELG-SM8E		Ni-Cd	3.6V-0.8Ah	8 Led	1h: 185 Lm, 3h:70 Lm
ELG-SM15E			3.6V-1.5Ah		1h: 290 Lm, 3h:135 Lm
ELG-SM25E			3.6V-2.5Ah		1h: 300 Lm, 3h:210 Lm
ELG-SM30E		Ni-MH	3.6V-3.0Ah	8 Led	1h: 300 Lm, 3h:300 Lm
ELG-SM15E-MH			3.6V-1.5Ah		1h: 300 Lm, 3h:150 Lm
ELG-SM22E-MH			3.6V-2.2Ah		1h: 300 Lm, 3h:200 Lm
ELG-SM40E	3.6V-4.0Ah		3h: 300 Lm, 8h:130 Lm		
ELG-SM116-ST-LF	SELF TEST	Li-FePO4	3.2V-1.6Ah	8 Led	1h: 290 Lm, 3h:145 Lm
ELG-SM138-ST-LF			3.2V-3.8Ah	3h: 290 Lm, 8h:110 Lm	
ELG-HP216-ST-LF		30 Led	6.4V-1.6Ah	1h: 500 Lm, 3h:250 Lm	
ELG-HP238-ST-LF			6.4V-3.8Ah	3h: 500 Lm, 8h:180 Lm	
ELG-SM8-ST		Ni-Cd	3.6V-0.8Ah	8 Led	1h: 185 Lm, 3h:70 Lm
ELG-SM15-ST			3.6V-1.5Ah		1h: 290 Lm, 3h:135 Lm
ELG-SM25-ST			3.6V-2.5Ah		1h: 300 Lm, 3h:210 Lm
ELG-SM30-ST		Ni-MH	3.6V-3.0Ah	8 Led	1h: 300 Lm, 3h:300 Lm
ELG-SM15-ST-MH			3.6V-1.5Ah		1h: 300 Lm, 3h:150 Lm
ELG-SM22-ST-MH			3.6V-2.2Ah		1h: 300 Lm, 3h:200 Lm
ELG-SM40-ST	3.6V-4.0Ah		3h: 300 Lm, 8h:130 Lm		
ELG-SM116-DALI	DALI	Li-FePO4	3.2V-1.6Ah	8 Led	1h: 290 Lm, 3h:145 Lm
ELG-SM138-DALI			3.2V-3.8Ah		3h: 300 Lm, 8h:120 Lm
ELG-SM15-DALI-NC		Ni-Cd	3.6V-1.5Ah		1h: 290 Lm, 3h:135 Lm
ELG-SM15-DALI		Ni-MH	3.6V-1.5Ah		1h: 290 Lm, 3h:135 Lm
ELG-SM22-D			3.6V-2.2Ah		1h: 290 Lm, 3h:135 Lm
ELG-SM22-DALI	3.6V-2.2Ah	1h: 300 Lm, 3h:200 Lm			
ELG-824	CENTRAL	24 VOLT AC/DC	8 Led	150 Lm	
ELG-2024			30 Led	800 Lm	
ELG-8230		8 Led	280 Lm		
ELG-20230	CENTRAL DALI	230 VOLT AC/DC	30 Led	800 Lm	
ELG-20230-DALI			800 Lm		
ELG-PAD-SET	SIGN PAD	Sign Pad Set (Up, Down, Right, Left & White pad)			
ELG-PAD-UP		Up side sign pad			
ELG-PAD-DOWN		Down side sign pad			
ELG-PAD-LEFT		Left side sign pad			
ELG-PAD-RIGHT		Right side sign pad			
ELG-PAD-WHITE	White pad				
ELG-PERSPEX-SET	ACCESSORIES	Perspex sign set			
ELG-ANK		Recessed mounting box			
ELG-PRGRID		Protection grid			

Dimensions (mm)

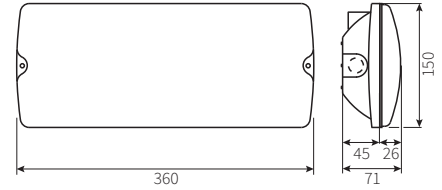

Viewing Distance

