

# Elegance Slim



# Elegance Slim

Emergency Luminaires & Exit Signs  
Surface Mounted, Single Sided

## Specifications


Application	Escape Sign, Anti-Panic Lighting, Escape Route lighting, Hazardous Area Lighting
Mounting	Direct mounting to wall & ceiling. Recessed mounting is available by accessory
Type	Manual Test, Self Test, DALI, Central
Mode	Selectable maintained/non-maintained
Emergency Duration	Selectable 1/3 hours
Viewing Distance	23m. Single sided
Light Source	LED module, 12 mid power leds, 6500K, CRI>80
Battery	Ni-Cd, Ni-MH, Li-FePO4
Wiring	Up to 2x2,5 mm <sup>2</sup> quick fit terminal block
Cable Entry	Four easy breakable entry holes back, rear & top parts
Power Supply	230 Volt, 50/60Hz, max 0,05A, max 5W
Protection	IP65
Temperature Range	5-40°C
Electrical Class	Class II (no earth wiring required)
Material	White polycarbonate housing



## Ordering Details

Code	Type	Battery	Led Module	Duration & Light Output	
ELGS-SM116E-LF	ECO	Li-FePO4	3.2V-1.6Ah	8 Led	1h: 290 Lm, 3h:145 Lm
ELGS-SM138E-LF			3.2V-3.8Ah		3h: 290 Lm, 8h:110 Lm
ELGS-HP216E-LF			6.4V-1.6Ah	30 Led	1h: 500 Lm, 3h:250 Lm
ELGS-HP238E-LF			6.4V-3.8Ah		3h: 500 Lm, 8h:180 Lm
ELGS-SM8E		Ni-Cd	3.6V-0.8Ah	8 Led	1h: 185 Lm, 3h:70 Lm
ELGS-SM15E			3.6V-1.5Ah		1h: 290 Lm, 3h:135 Lm
ELGS-SM15E-MH			3.6V-1.5Ah		1h: 300 Lm, 3h:150 Lm
ELGS-SM22E-MH		Ni-MH	3.6V-2.2Ah	8 Led	1h: 300 Lm, 3h:200 Lm
ELGS-SM116-ST-LF			Li-FePO4		3.2V-1.6Ah
ELGS-SM138-ST-LF		3.2V-3.8Ah		3h: 290 Lm, 8h:110 Lm	
ELGS-HP216-ST-LF	6.4V-1.6Ah	30 Led		1h: 500 Lm, 3h:250 Lm	
ELGS-HP238-ST-LF	6.4V-3.8Ah			3h: 500 Lm, 8h:180 Lm	
ELGS-SM8-ST	Ni-Cd	3.6V-0.8Ah		8 Led	1h: 185 Lm, 3h:70 Lm
ELGS-SM15-ST		3.6V-1.5Ah			1h: 290 Lm, 3h:135 Lm
ELGS-SM25-ST		3.6V-2.5Ah			1h: 300 Lm, 3h:210 Lm
ELGS-SM15-ST-MH	Ni-MH	3.6V-1.5Ah		8 Led	1h: 300 Lm, 3h:150 Lm
ELGS-SM22-ST-MH		3.6V-2.2Ah			1h: 300 Lm, 3h:200 Lm
ELGS-SM116-DALI	DALI	Li-FePO4		3.2V-1.6Ah	8 Led
ELGS-SM138-DALI			3.2V-3.8Ah	3h: 300 Lm, 8h:120 Lm	
ELGS-SM15-DALI-NC		Ni-Cd	3.6V-1.5Ah	8 Led	1h: 290 Lm, 3h:135 Lm
ELGS-SM15-DALI			3.6V-1.5Ah		1h: 290 Lm, 3h:135 Lm
ELGS-SM22-D		Ni-MH	3.6V-2.2Ah	8 Led	1h: 290 Lm, 3h:135 Lm
ELGS-SM22-DALI			3.6V-2.2Ah		1h: 300 Lm, 3h:200 Lm
ELGS-1224	CENTRAL	24 VOLT AC/DC	8 Led	150 Lm	
ELGS-2024			30 Led	800 Lm	
ELGS-12230		230 VOLT AC/DC	8 Led	280 Lm	
ELGS-20230			30 Led	800 Lm	
ELGS-20230-DALI	CENTRAL DALI		30 Led	800 Lm	
ELGS-PAD-SET	SIGN PAD	Sign Pad Set (Up, Down, Right, Left & White pad)			
ELGS-PAD-UP		Up side sign pad			
ELGS-PAD-DOWN		Down side sign pad			
ELGS-PAD-LEFT		Left side sign pad			
ELGS-PAD-RIGHT		Right side sign pad			
ELGS-PAD-WHITE		White pad			
ELGS-PERSPEX-SET	ACCESSORIES	Perspex sign set			
ELGS-ANK		Recessed mounting box			
ELGS-PRGRID		Protection grid			

## Dimensions (mm)

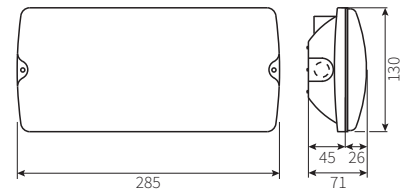

## Viewing Distance

