

Ni-Cd & Ni-MH Batteries For Emergency Luminaires & Exit Signs



General Specifications

- High temperature sealed type battery blocks
- Ni-Cd / Ni-MH models
- Male/female connector set
- EN 62133 Certified products
- EN 61951-1 Certification for Ni-Cd batteries
- EN 61951-2 Certification for Ni-MH batteries

Technical Specifications

Voltage : 1.2 Volt/cell

Capacity : 300mAh upto 4.500 mAh

Emergency Duration : 1 or 3 hours




Ambient Temperature : max 70°C for Ni-Cd

Ambient Temperature : max 55°C for Ni-MH


Color : White

Cable Length : 300mm (with connector set)

Types & Dimensions

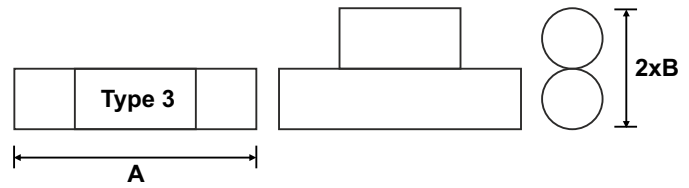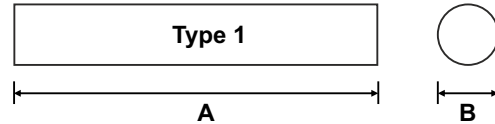

Code Description

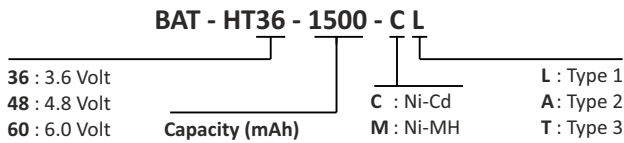

Ordering Details

Code	Technology	Voltage	Capacity	Type	A (mm)	B (mm)
BAT-HT36-300ML	Ni-MH	3.6 Volt	300 mAh	1	90	15
BAT-HT36-650ML	Ni-MH	3.6 Volt	650 mAh	1	90	17
BAT-HT36-800CL	Ni-Cd	3.6 Volt	800 mAh	1	150	15
BAT-HT36-1200CL	Ni-Cd	3.6 Volt	1.200 mAh	1	130	17
BAT-HT36-1500CL	Ni-Cd	3.6 Volt	1.500 mAh	1	130	23
BAT-HT36-1500ML	Ni-MH	3.6 Volt	1.500 mAh	1	150	15
BAT-HT36-1500MA	Ni-MH	3.6 Volt	1.500 mAh	2	50	15
BAT-HT36-1500CT	Ni-Cd	3.6 Volt	1.500 mAh	3	90	23
BAT-HT36-1500MT	Ni-MH	3.6 Volt	1.500 mAh	3	102	15
BAT-HT36-1700CL	Ni-Cd	3.6 Volt	1.700 mAh	1	130	23
BAT-HT36-2200ML	Ni-MH	3.6 Volt	2.200 mAh	1	130	23
BAT-HT36-2500CL	Ni-Cd	3.6 Volt	2.500 mAh	1	147	26
BAT-HT36-3000CL	Ni-Cd	3.6 Volt	3.000 mAh	1	147	26
BAT-HT36-3500CL	Ni-Cd	3.6 Volt	3.500 mAh	1	180	26
BAT-HT36-4500CL	Ni-Cd	3.6 Volt	4.500 mAh	1	180	33
BAT-HT48-1700CL	Ni-Cd	4.8 Volt	1.700 mAh	1	170	23
BAT-HT48-4500CL	Ni-Cd	4.8 Volt	4.500 mAh	1	240	33
BAT-HT60-1700CL	Ni-Cd	6.0 Volt	1.700 mAh	1	220	23
BAT-HT60-4500CL	Ni-Cd	6.0 Volt	4.500 mAh	1	300	33