


Ni-Cd, Ni-MH & LiFePO4 Batteries for Emergency Luminaires

Specifications


- High temperature sealed type battery packs
- Ni-Cd, Ni-MH and Li-FePO4 models
- Integrated male/female connector set
- EN 61951-1 Certification for Ni-Cd batteries
- EN 61951-2 Certification for Ni-MH batteries
- EN 62133 Certification for Li-FePO4 batteries
- Capacity : 300mAh up to 4.500 mAh
- Temperature : max 70°C for Ni-Cd
- Temperature : max 55°C for Ni-MH
- Color : White
- Cable Length : 300mm (with connector set)



Code Description

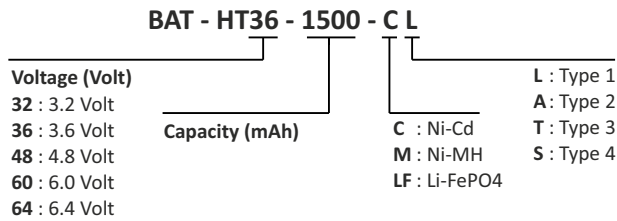

Types & Dimensions

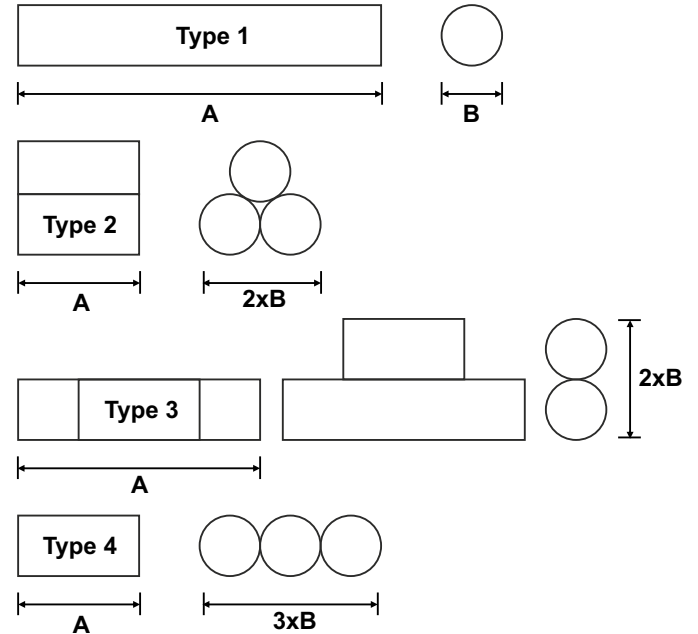

Code	Technology	Voltage	Capacity	Type	A (mm)	B (mm)
BAT-HT36-800CL	Ni-Cd	3.6 Volt	800 mAh	1	150	15
BAT-HT36-800CS	Ni-Cd	3.6 Volt	800 mAh	4	50	15
BAT-HT36-1200CL	Ni-Cd	3.6 Volt	1.200 mAh	1	130	17
BAT-HT36-1500CL	Ni-Cd	3.6 Volt	1.500 mAh	1	130	23
BAT-HT36-1500CT	Ni-Cd	3.6 Volt	1.500 mAh	3	50	23
BAT-HT36-1700CL	Ni-Cd	3.6 Volt	1.700 mAh	1	130	23
BAT-HT36-2500CL	Ni-Cd	3.6 Volt	2.500 mAh	1	147	26
BAT-HT36-3000CL	Ni-Cd	3.6 Volt	3.000 mAh	1	147	26
BAT-HT36-3500CL	Ni-Cd	3.6 Volt	3.500 mAh	1	210	18
BAT-HT36-4500CL	Ni-Cd	3.6 Volt	4.500 mAh	1	180	33
BAT-HT48-1700CL	Ni-Cd	4.8 Volt	1.700 mAh	1	170	23
BAT-HT48-4500CL	Ni-Cd	4.8 Volt	4.500 mAh	1	240	33
BAT-HT60-1700CL	Ni-Cd	6.0 Volt	1.700 mAh	1	220	23
BAT-HT60-4500CL	Ni-Cd	6.0 Volt	4.500 mAh	1	300	33
BAT-HT36-300ML	Ni-MH	3.6 Volt	300 mAh	1	90	15
BAT-HT36-650ML	Ni-MH	3.6 Volt	650 mAh	1	90	17
BAT-HT36-1500ML	Ni-MH	3.6 Volt	1.500 mAh	1	90	15
BAT-HT36-1500MA	Ni-MH	3.6 Volt	1.500 mAh	1	150	15
BAT-HT36-1500MT	Ni-MH	3.6 Volt	1.500 mAh	2	102	15
BAT-HT36-2200ML	Ni-MH	3.6 Volt	2.200 mAh	3	130	23
BAT-HT36-2200MS	Ni-MH	3.6 Volt	2.200 mAh	4	70	44
BAT-HT36-4000ML	Ni-MH	3.6 Volt	4.000 mAH	1	215	19
BAT-HT32-1600LFL	Li-FePO4	3.2 Volt	1.600 mAH	1	70	19
BAT-HT64-1600LFL	Li-FePO4	6.4 Volt	1.600 mAH	1	135	19
BAT-HT64-3800LFL	Li-FePO4	6.4 Volt	3.800 mAH	1	135	26