

StarLED



StarLED

Emergency Luminaires & Exit Signs
Surface Mounted, Single or Double Sided

Specifications


Application	Escape Sign, Anti-Panic Lighting, Escape Route lighting, Hazardous Area Lighting
Mounting	Direct mounting to wall & ceiling. Suspended & recessed mounting is available by accessories
Type	Manual Test, Self Test, DALI
Mode	Selectable maintained/non-maintained
Emergency Duration	Selectable 1/3 hours
Viewing Distance	24m. Single sided, double sided by perspex slab
Light Source	LED module, 8 or 30 mid power leds, 6500K, CRI>80
Battery	Ni-Cd, Ni-MH, Li-FePO4
Wiring	Up to 2x2,5 mm ² quick fit terminal block
Cable Entry	Four easy breakable entry holes back, rear & top parts
Power Supply	230 Volt, 50/60Hz
Protection	IP65
Temperature Range	5-40°C
Electrical Class	Class II (no earth wiring required)
Material	White polycarbonate housing



Ordering Details

Product Code	Type	Battery	Led Module	Duration & Light Output		
STR-SM116E-LF	ECO	Li-FePO4	3.2V-1.6Ah	8 Led	1h: 290 Lm, 3h:145 Lm	
STR-SM138E-LF			3.2V-3.8Ah	8 Led	3h: 290 Lm, 8h:110 Lm	
STR-HP216E-LF			6.4V-1.6Ah	30 Led	1h: 500 Lm, 3h:250 Lm	
STR-HP238E-LF			6.4V-3.8Ah	30 Led	3h: 500 Lm, 8h:180 Lm	
STR-SM8E		Ni-Cd	3.6V-0.8Ah	8 Led	1h: 185 Lm, 3h:70 Lm	
STR-SM15E			3.6V-1.5Ah	8 Led	1h: 290 Lm, 3h:135 Lm	
STR-SM25E			3.6V-2.5Ah	8 Led	1h: 300 Lm, 3h:210 Lm	
STR-SM30E			3.6V-3.0Ah	8 Led	1h: 300 Lm, 3h:300 Lm	
STR-SM15E-MH			Ni-MH	3.6V-1.5Ah	8 Led	1h: 300 Lm, 3h:150 Lm
STR-SM22E-MH				3.6V-2.2Ah	8 Led	1h: 300 Lm, 3h:200 Lm
STR-SM40E		3.6V-4.0Ah		8 Led	3h: 300 Lm, 8h:130 Lm	
STR-SM116-ST-LF		SELF TEST	Li-FePO4	3.2V-1.6Ah	8 Led	1h: 290 Lm, 3h:145 Lm
STR-SM138-ST-LF	3.2V-3.8Ah			8 Led	3h: 290 Lm, 8h:110 Lm	
STR-HP216-ST-LF	6.4V-1.6Ah			30 Led	1h: 500 Lm, 3h:250 Lm	
STR-HP238-ST-LF	6.4V-3.8Ah			30 Led	3h: 500 Lm, 8h:180 Lm	
STR-SM8-ST	Ni-Cd		3.6V-0.8Ah	8 Led	1h: 185 Lm, 3h:70 Lm	
STR-SM15-ST			3.6V-1.5Ah	8 Led	1h: 290 Lm, 3h:135 Lm	
STR-SM25-ST			3.6V-2.5Ah	8 Led	1h: 300 Lm, 3h:210 Lm	
STR-SM30-ST			3.6V-3.0Ah	8 Led	1h: 300 Lm, 3h:300 Lm	
STR-SM15-ST-MH			Ni-MH	3.6V-1.5Ah	8 Led	1h: 300 Lm, 3h:150 Lm
STR-SM22-ST-MH				3.6V-2.2Ah	8 Led	1h: 300 Lm, 3h:200 Lm
STR-SM40-ST	3.6V-4.0Ah			8 Led	3h: 300 Lm, 8h:130 Lm	
STR-SM116-DALI	DALI		Li-FePO4	3.2V-1.6Ah	8 Led	1h: 290 Lm, 3h:145 Lm
STR-SM138-DALI		3.2V-3.8Ah		8 Led	3h: 300 Lm, 8h:120 Lm	
STR-SM15-DALI-NC		Ni-Cd	3.6V-1.5Ah	8 Led	1h: 290 Lm, 3h:135 Lm	
STR-SM15-DALI			3.6V-1.5Ah	8 Led	1h: 290 Lm, 3h:135 Lm	
STR-SM22-D (Tridonic)		Ni-MH	3.6V-2.2Ah	8 Led	1h: 290 Lm, 3h:135 Lm	
STR-SM22-DALI			3.6V-2.2Ah	8 Led	1h: 300 Lm, 3h:200 Lm	
STR-824	CENTRAL	24 VOLT AC/DC	8 Led	150 Lm		
STR-3024			30 Led	800 Lm		
STR-8230		230 VOLT AC/DC	8 Led	280 Lm		
STR-30230			30 Led	800 Lm		
STR-20230-DALI	CENTRAL DALI		30 Led	800 Lm		
STR-ETK-SET	SIGN PAD	Sign Pad Set (Up, Down, Right, Left & White pad)				
STR-ETK-UP		Up side sign pad				
STR-ETK-DOWN		Down side sign pad				
STR-ETK-LEFT		Left side sign pad				
STR-ETK-RIGHT		Right side sign pad				
STR-ETK-WHITE		White pad				
STR-PERSPEX-SET	ACCESSORIES	Perspex sign set				
STR-ANK		Recessed mounting box				
STR-PRGRID		Protection grid				

Dimensions (mm)

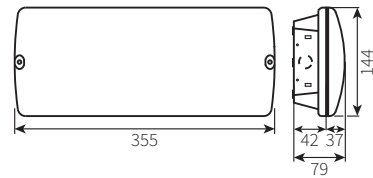

Viewing Distance

